

IT CAN NEVER



LOUD

RAGE10 CXP



10" / 254 MM
Chassis Diameter

600W
MAX power

92 DB
Sensitivity

50-18000HZ
Frequency Response

2.5" / 63.5MM
Aluminium voice coil

ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	10/254 in/mm
MAX Power	600 Watts
RMS Power	300 Watts
Impedance	4 Ohm
Resonance(natural) Frequency	51.0 Hz
Frequency Response	50-18000 Hz
Sensitivity	92dB
Tweeter Voice Coil Diameter	1.75"/44mm
Voice Coil Diameter	2.5"/63.5mm
Winding material	ALUMINIUM
Magnet (dsc only)	50 Oz


THIELE SMALL PARAMETERS

FS	51.0 Hz
Vas	46.0 L
REOhms	3.4 ohm
Qms	3.57
Qes	0.631
Qts	0.536
BLT/m	7.9 T/m
MMS (g)	36.7 grams
Xmax(mm)	5 mm
Sd(cm ²)	353 cm ²
Efficiency%	0.93%
Le(1k Hz)	0.7mH
EBP	80.79

MOUNTING / SHIPPING INFORMATION

Overall Diameter	10.4/265 in/mm
Bolt Circle Diameter	9.9/252 in/mm
Baffle cutout Diameter	9.2/235 in/mm
Depth	6.2/158 in/mm
Net Weight(1 PC)	4.9 Kg
Shipping Weight(1PC)	5.6 Kg
Shipping Box(1PC)	29x29x18.5cm

FREQUENCY RESPONSE DATA

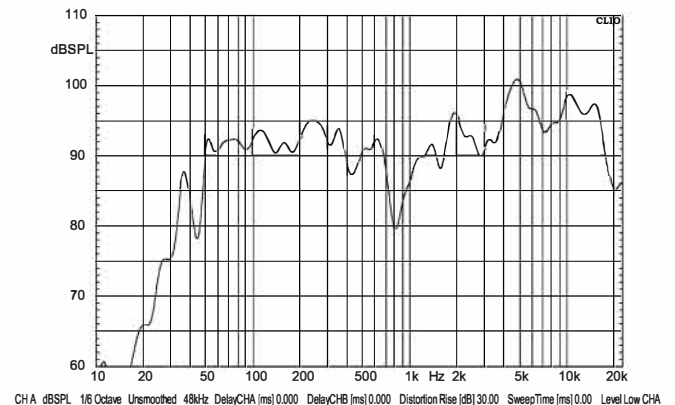

* Please note that the frequency response measurements are supplied for comparison only and are not a measure of the low frequency performance which may be achieved in a fully optimised system.